

POLYURETHANE FILTER MAT

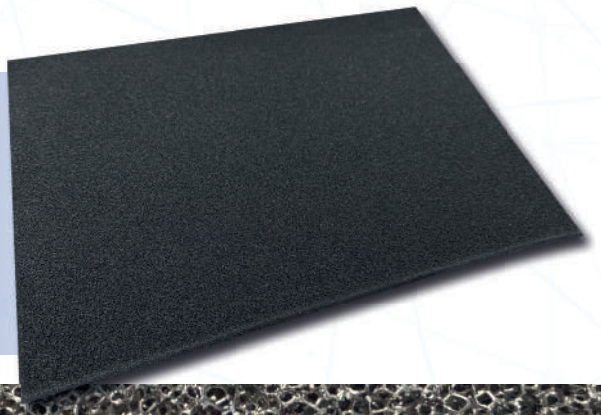

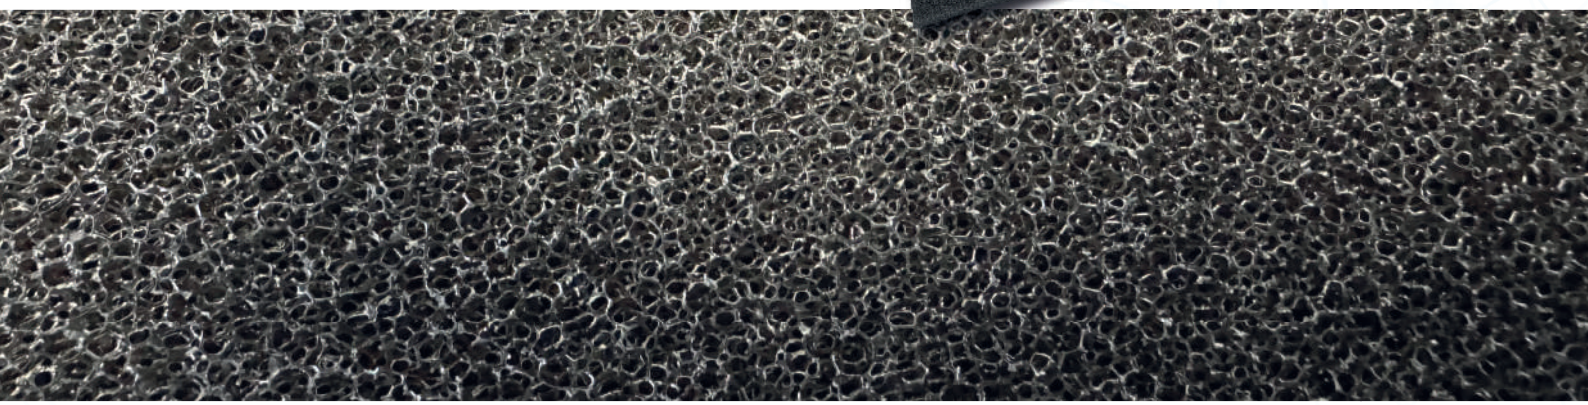

Applications:
Pre-filter for ventilation equipment and HVAC

Highlights:
- Washable

Filter Standard:	ISO 16890
Filter class:	ISO Coarse
Rec. Final Pressure Drop EN13053:	Initial ΔP +50 Pa or initial ΔP x3 whichever is lower

Max. Operating Tempature:	80°C
Standard depth:	6 - 8 - 10 - 20 mm

Filter Model	Filter Class EN 779 (cancelled)	Filter Class ISO 16890	Media Material	Dimensions WxL (mm)	Thickness (mm)	Air Velocity (m/s)	Initial Pressure Drop (Pa)
PT-G2-T6-1000-2000	G2	Coarse 25%	Polyurethane	1.000x2.000	6	2	20
PT-G2-T8-1000-2000	G2	Coarse 25%	Polyurethane	1.000x2.000	8	2	20
PT-G3-T10-1000-2000	G3	Coarse 40%	Polyurethane	1.000x2.000	10	2	30
PT-G3-T20-1000-2000	G3	Coarse 40%	Polyurethane	1.000x2.000	20	2	30
PT-G2-T6-1570-2000	G2	Coarse 25%	Polyurethane	1.570x2.000	6	2	20
PT-G2-T8-1570-2000	G2	Coarse 25%	Polyurethane	1.570x2.000	8	2	20
PT-G3-T10-1570-2000	G3	Coarse 40%	Polyurethane	1.570x2.000	10	2	30
PT-G3-T20-1570-2000	G3	Coarse 40%	Polyurethane	1.570x2.000	20	2	30

POLYURETHANE FILTER MAT CODE CONFIGURATION

Filter Type	Filter Class	Thickness (mm)	Width (mm)	Length (mm)
PT : Polyurethane Filter Mat	G2 G3	T6 : 6 mm T8 : 8 mm T10 : 10 mm T20 : 20 mm	1000-1570	2000