

POLYURETHANE FANCOIL FILTER

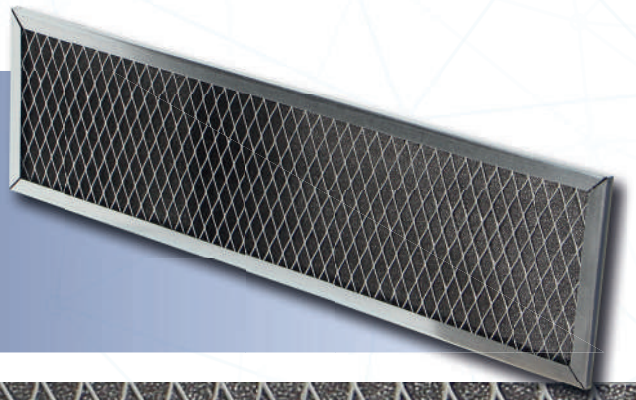

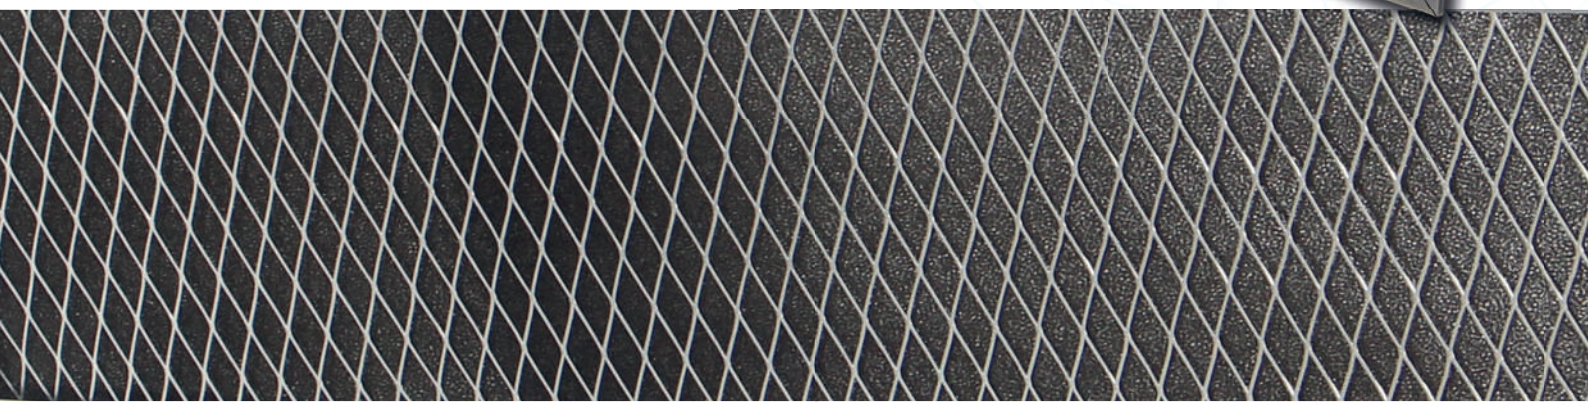

Applications:
Fan-coil Units

Highlights:
- Robust construction
- Washable

Filter Standard:	ISO 16890	**Rec. Final Pressure Drop EN13053:**	Initial ΔP +50 Pa or initial ΔP x3 whichever is lower
Filter Class:	ISO Coarse	**Max. Operating Tempature:**	80°C
Media:	Polyurethane	**Standard depth:**	6 - 8 - 10 mm
Frame:	Galvanized	**Expended Metal (Mesh):**	Double Side

Filter Model	Filter Class EN 779 (cancelled)	Filter Class ISO 16890	Media Material	Width (mm)	Height (mm)	Depth (mm)	Air Velocity (m/s)	Initial Pressure Drop (Pa)
PF-G2-G-175-(400 to 1500)-8	G2	Coarse 25%	Polyurethane	175	400-1500	8	2	45
PF-G2-G-185-(400 to 1500)-8	G2	Coarse 25%	Polyurethane	185	400-1500	8	2	45
PF-G2-G-205-(400 to 1500)-8	G2	Coarse 25%	Polyurethane	205	400-1500	8	2	45
PF-G2-G-210-(400 to 1500)-8	G2	Coarse 25%	Polyurethane	210	400-1500	8	2	45
PF-G2-G-245-(400 to 1500)-8	G2	Coarse 25%	Polyurethane	245	400-1500	8	2	45

"Other dimensions are available on request."
"Differential Pressure Tolerance (±10% + 5 Pa) or (10 Pa + 5 Pa) whichever is greater"

POLYURETHANE FANCOIL FILTER CODE CONFIGURATION

Filter Type	Filter Class	Frame	Dimensions (mm)
PF : Polyurethane Fancoil Filter	G2	G: Galvanized	400-1500x8 mm

