
GLASS FIBER ROLL FILTER

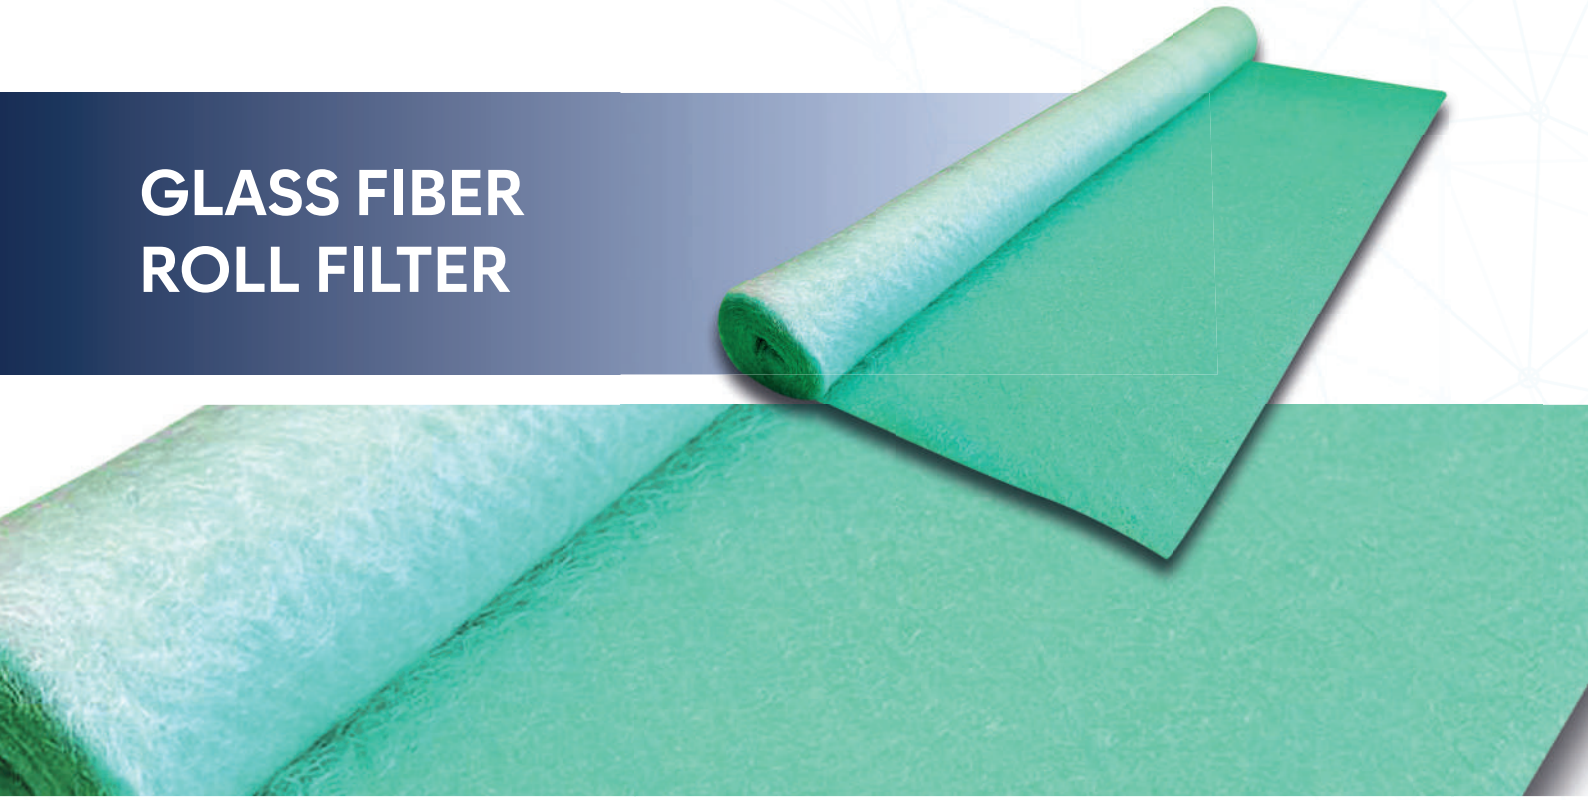

Applications:
Pre-filter for ventilation equipment and HVAC
Paint booths

Highlights:
- High dust holding capacity
- Dust / paint holder

Filter Standard:	ISO 16890	**Rec. Final Pressure Drop EN13053:**	250 Pa
Filter Class:	ISO Coarse	**Max. Operating Tempature:**	120°C
Media:	Glass Fiber	**Thickness:**	75 - 100 mm

Filter Model	Filter Class EN 779 (cancelled)	Filter Class ISO 16890	Media Material	Dimensions WxL (mm)	Thickness (mm)	Media Weight (g/m²)
GC-G3-T75-1000-20000	G3	Coarse 45%	Glass Fiber	1.000x20.000	75	250
GC-G3-T75-2000-20000	G3	Coarse 45%	Glass Fiber	2.000x20.000	75	250
GC-G4-T100-1000-20000	G4	Coarse 55%	Glass Fiber	1.000x20.000	100	300
GC-G4-T100-2000-20000	G4	Coarse 55%	Glass Fiber	2.000x20.000	100	300

ULPATEK ROLL FILTERS		GR-G3	GR-G4
Filter Class according to EN 779 (cancelled)		G3	G4
Filter Class according to EN 16890		Coarse 45%	Coarse 55%
Nominal Face Velocity	m/s	1,5	1,5
Nominal Air Flow	m³/h.m²	5400	5400
Initial Pressure Drop at Nominal Air Flow	Pa	30	40
Final Pressure Drop	Pa	250	250
Average Arrestance (Am)	%	82,5	92
Thickness	mm	75	100
Weight	g/m²	250	300
Roll Dimensions (W x L)	m	2 x 20	
Temperature Resistance	°C	120	
Maximum Relative Humidity	%	100	
Filter Media		Glass Fiber	

GLASS FIBER ROLL FILTER CODE CONFIGURATION

Filter Type	Filter Class	Thickness (mm)	Width (mm)	Length (mm)
GC : Glass Fiber Roll Filter	G3 G4	T75 T100	1000-2000	10.000-20.000