
ACTIVATED CARBON ZIG-ZAG FILTER

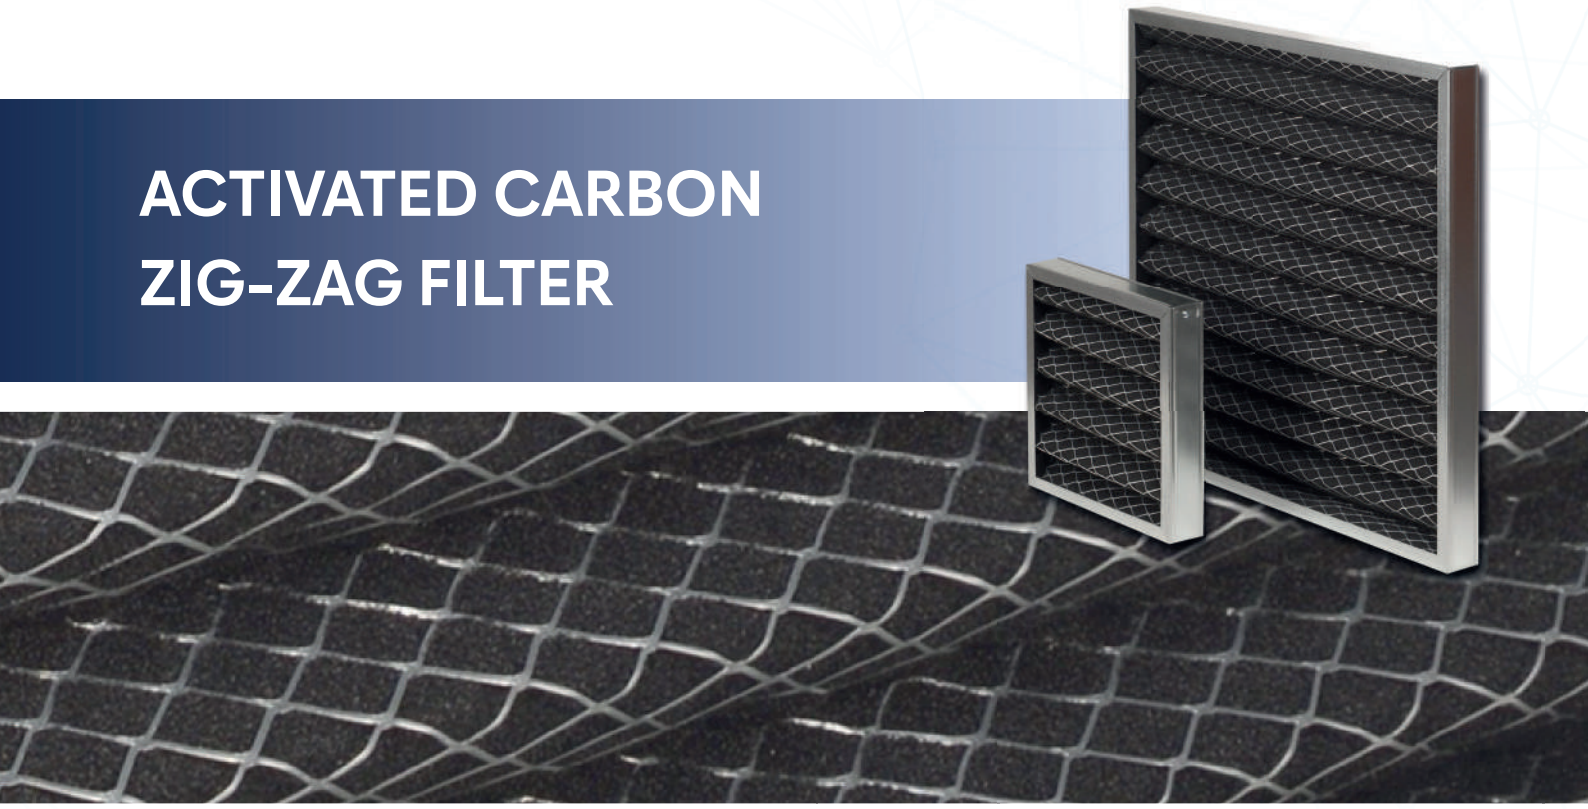

Applications:
Pre-filter for HVAC
Offices
Hospitals
Airports

Highlights:
- Synthetic fiber impregnated with carbon
- Easy assembly
- Odors

Media:	Synthetic fiber impregnated with carbon	**Max. Operating Temperature:**	50°C
Frame:	Galvanized Steel	**Standard depth:**	48 - 96 mm

Filter Model	Media Material	Dimensions WxHxD (mm)	Nominal Airflow (m^3/h)	Pressure Drop (Pa)
ACZ-G-287-287-48	Activated carbon	287x287x48	1000	80
ACZ-G-287-592-48	Activated carbon	287x592x48	1700	80
ACZ-G-592-592-48	Activated carbon	592x592x48	2000	80
ACZ-G-287-287-96	Activated carbon	287x287x96	1000	70
ACZ-G-287-592-96	Activated carbon	287x592x96	1700	70
ACZ-G-592-592-96	Activated carbon	592x592x96	2000	70

ACTIVATED CARBON ZIG-ZAG CODE CONFIGURATION

Filter Type	Frame	Dimensions
ACZ : Activated Carbon Zig-Zag Filter	G: Galvanized Metal	592x592x48

